

## **Project 2: Energy Storage Devices Based on Three Dimensional (3D) Graphene: Case Supercapacitors and Lithium–Sulfur (Li-S) Batteries**

### **Area Coordinator:**

Dr. Vesselin Shanov  
Professor of Chemical Engineering  
Department of Biomedical, Chemical and Environmental Engineering  
University of Cincinnati  
Cincinnati, OH 45221-0012  
Office: 580 ERC  
E-Mail: vesselin.shanov@uc.edu  
Phone: (513)-556-2461

### **Sub- Area Coordinator:**

Dr. Noe Alvarez  
Research Associate in Chemical Engineering  
Department of Biomedical, Chemical and Environmental Engineering  
University of Cincinnati  
Cincinnati, OH 45221-0012  
Office: 562 ERC  
E-Mail: alvarene@UCMAIL.UC.EDU

### **Graduate Research Assistant:**

Ms. Yu-Yun Hsieh  
Ph.D. Student in Materials Engineering  
Office: 401 Rhodes Hall  
Phone: (513) 384-7298  
E-Mail: hsiehyu@mail.uc.edu

## **Project Summary**

### ***What is the nature of the proposed RET project and the questions it answers.***

The fast development of renewable and sustainable energy techniques such as solar cells and wind turbines requires efficient energy storage systems to offset the fluctuations in power availability caused by clouds or varying winds. Here we propose for this RET project to make a seamless 3D graphene structure called a Graphene Pellet (GP) that is synthesized through chemical vapor deposition (CVD) using inexpensive nickel powder as catalyst template [1,2]. GP is an important new platform for fabricating high performance supercapacitors, which is the first application of GP we intend to pursue. GP possesses well-controlled pore size (~2 nm), high electrical conductivity (148 S/cm) and good electromechanical properties. After electrochemical coating with MnO<sub>2</sub>, the GP/MnO<sub>2</sub> electrode shows specific and volumetric capacitance up to 415 F g<sup>-1</sup> and 235 F cm<sup>-3</sup> respectively, with capacitance retention of 90% after 5000 charge-discharge cycles. Moreover, when GP/MnO<sub>2</sub> electrode was assembled with GP/polypyrrole electrode, the fabricated full cell prototype (supercapacitor) showed a superior electrochemical performance with a maximum energy density of 22.3 Wh/kg, maximum power density of 16.4 kW/kg, and very good cycle life that was able to power a light emitting diode (LED). These performance characteristics compare favorably to existing supercapacitors.

### ***What work needs to be conducted to achieve the objectives?***

- Fabricating of multiple supercapacitors with reproducible properties involves 6 tasks:
- Purchase of 20 commercially available housing of supercapacitors and batteries.
  - Synthesis of 3D graphene.
  - Manufacturing of the positive electrodes of the supercapacitors and batteries.

- Manufacturing of the negative electrodes of the supercapacitors and batteries.
- Assembling the supercapacitor and battery devices.
- Electrochemical testing the supercapacitor and battery devices.

***What research facilities will be used to conduct the research?***

The Nanoworld Laboratory at University of Cincinnati (<http://www.min.uc.edu/nanoworldsmart>) will be used for the RET research project. It is a college laboratory for material and device development, teaching, and demonstrations. Nanoworld is an internationally recognized laboratory for trailblazing and road mapping innovation, translating the discoveries to industry, and training a next generation workforce that will be in high-demand.

Six labs form the Nanoworld Labs at University of Cincinnati:

- NANOWORLD, Main Lab 414A, 414B & 413 Rhodes Hall, Ph. 513-556-4652
- Nanoscale Devices and SEM Lab, 315 ERC
- Nanoscale Materials Post-processing Lab, Rhodes 611
- Nanocomposite Materials and Characterization Lab, Rhodes 507
- Substrates and Nanomaterials Processing Laboratory, 581 Engineering Research Center (ERC)
- Pilot Microfactory for Nanomedicine Devices Lab, 587 ERC

Nanoworld may be the largest nanotube research laboratory in an academic setting with three commercial nanotube reactors to synthesize nanotube materials and transition the processes to industry. Nanotube reactors are in continuous operation along with post-processing and characterization equipment. Mg single crystal manufacturing and coating systems are also used for developing biodegradable implants.


University of Cincinnati Nanoworld supports research for undergraduate and graduate students from across the university. Prof. Vesselin Shanov of the Chemical, Biological and Environmental Engineering (CBEE) Department and Prof. Mark Schulz of the Mechanical and Materials Engineering (MME) Department direct the Nanoworld lab. Faculty members from across the University and from the UC Medical School collaborate with Nanoworld.

The main nanotechnology research in Nanoworld is in the field of synthesis, processing and characterization of carbon nanostructured materials, fibers, metal nanowires, nanocomposites, smart structures, electromagnetic devices, and sensors. Nanoworld is also developing innovations in medicine including Mg materials for biodegradable implants, microsensors and devices for interventional cardiology and cancer, and smart biodegradable implants.

Nanoworld is also comprehensively involved in education and is frequently used to host middle school and high school students along with their science teachers. Nanoworld leads teaching two undergraduate nanotechnology courses at University of Cincinnati and one graduate course. These courses use state-of-the-art instrumentation in Nanoworld to perform lab modules. Also, students from other courses tour Nanoworld and learn about nanotechnology, biodegradable metals, biosensors, biomedical devices, and other advanced topics. Undergraduate through PhD students, post doctors, faculty members, and industry collaborators all work together in Nanoworld. Hundreds of people visit Nanoworld each year. The faculty members affiliated with Nanoworld bring a great deal of expertise and time to mentoring the students to assure the education and research experience is successful.

***Illustration of the current results related to this research project.***

**Figure 1.** displays achievements related to the proposed research, which also have been recently published [1, 2].

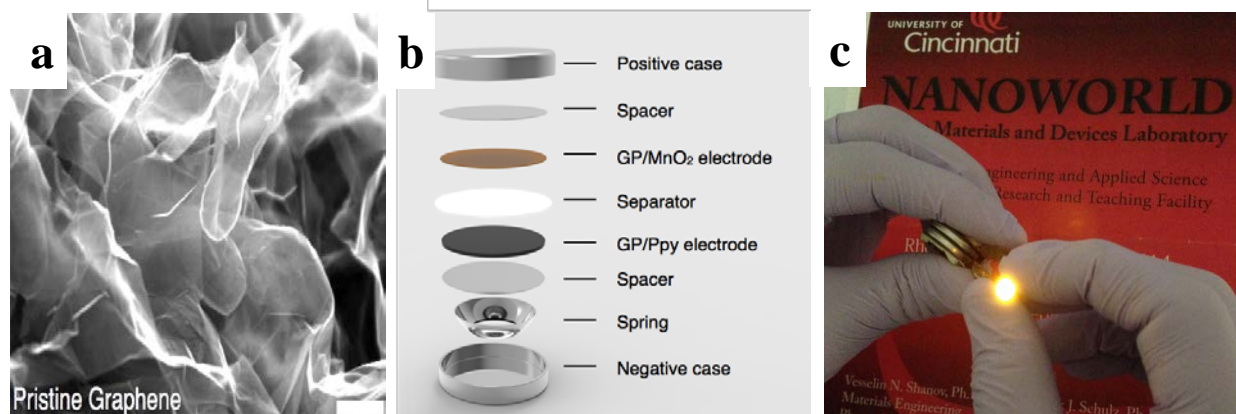

**Figure 1: SEM Image of Pristine Graphene Pellet-(a); Assembling of a Supercapacitor-(b); (c) Illustration of Two Stacked Supercapacitors Powering a LED (3.0V; 30mA)**

### **Possible Ideas for Classroom Implementation**

Making small supercapacitors and Li-S batteries for energy storage is technically possible in a Classroom. The students can assemble these devices and power a light emitting diode similar to the experiment illustrated in **Figure 1(c)**. University of Cincinnati can provide the needed electrode material and the housing for 5 supercapacitors and 5 batteries annually. The Big Idea is to use an existing energy storage device (supercapacitor or battery) that can be electrically charged for a short time, is light weight and has long cycling life, especially in generating power and specific energy. These devices will help to power portable electronics, including lap tops, cell phones and tablets and recharge them for a short time. The current charging time of these devices is hours and needs to be shortened to seconds. The end user of this technology is any person that is dealing with portable electronics, including cell phones, tablets and lap tops. In addition, military personal and first responders who are heavily equipped with electronic devices are expected to benefit from our light weight, long lasting and fast recharging energy storage device. Finally, persons with implanted (in body) medical devices, such as pace makers, will enjoy a long lasting power supply that may be rechargeable remotely (without surgically explanting the battery).

### **References**

1. Zhang L, Alvarez NT, Zhang M, Haase M, Malik R, Mast D, Shanov V. et al. Preparation and characterization of graphene paper for electromagnetic interference shielding. *Carbon*. 2015;82:353-9.
2. Shanov V., Zhang L., Alvarez N., Zhang M., DeArmond D., "A Graphene Paper and a Process for Making Graphene Paper and a Graphene with Three Dimensional Structure for High Performance Pseudocapacitor Electrode", U.S. Provisional Patent Application 62/144922, filed April 09, 2015, based on Invention Disclosure UC 114-036, 02/03/2014 and UC Invention Disclosure, 115-100, 03/26/2015.
3. Zhang L., DeArmond D., Alvarez N., Zhao D., Wang T., Hou G, Malik R., Heineman W., Shanov V., "Beyond Graphene Foam, a New Form of Three-Dimensional Graphene for Supercapacitor Electrode", *J. Materials Chemistry A*, 2016; 4: 1876-1886, DOI: 10.1039/C5TA10031C.